

SUPRASIL® 313



Highlights

- Direct formed Near-Net-Shape ingot
 - Production process cost optimized to maximize yield
 - Fine ground on request
- Broad transmission range from the UV to the IR
- OH Content ≤ 250 ppm
- Low absorption*
 - Absorption at 1064 nm: ≤ 3 ppm/cm

Index homogeneity

Striation

- No striations in the primary functional direction, i.e. striae class A according to MIL-G-174-B

Index (Δn)

- In the basic version the homogeneity of Suprasil® 313 is not specified and not measured [typically less than $10 \cdot 10^{-6}$].
- Index homogeneity can be custom tailored to specifications on request at additional cost.

Fluorescence

- None
- At stimulation with light at a wavelength of $\lambda = 254$ nm (Hg low pressure lamp and Schott UG 5 filter) and visual inspection.

Residual strain

- ≤ 5 nm/cm
- The residual strain value is specified over 90% of the diameter or edge length of a fine ground piece, or 80% of a raw formed ingot.

Bubbles and inclusions¹⁾

Bubble Grade

- Grade 0 (according to DIN 58927)

Bubbles according to DIN ISO 10110

- $1 / 1 \cdot 0.08$ for 100 cm^3

Inclusions

- None



1) Bubbles and inclusions < 0.08 mm diameter are not counted.

Application range

Suprasil® 313 may be used for optics requiring high transmission and low absorption from UV to IR combined with low bubble & inclusion content. Optics may include windows, lenses, laser debris shields and mirror substrates.

Typical transmission graph

(including reflection losses) for a wall thickness of 10 mm

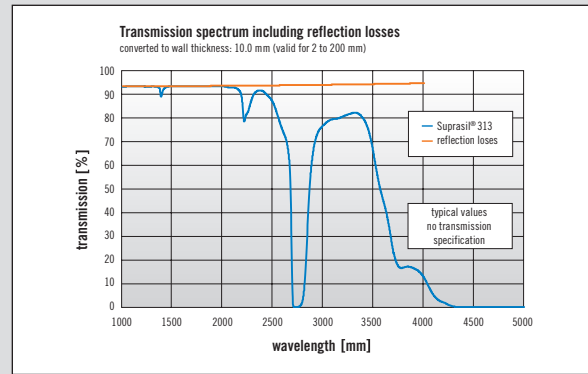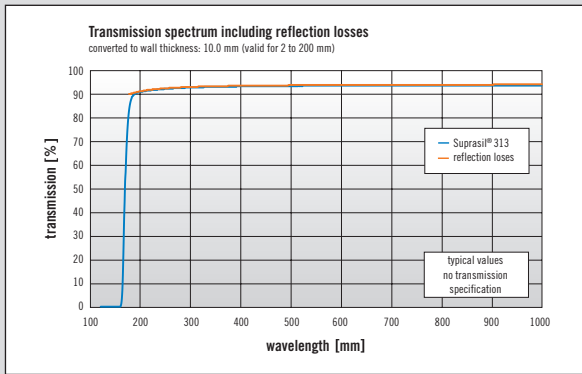

Decadic absorption coefficient at 200 nm

$k_{200} < 0.0025 \text{ cm}^{-1}$ (typical)
 $k_{200} < 0.005 \text{ cm}^{-1}$ (specified)

Internal transmission $T = 10^{-kd}$
 and $d =$ wall thickness

Infrared absorption (typical)*

■ OH absorption
 absorption at $1064 \text{ nm}^{1), 2)} \leq 3 \text{ ppm/cm}$

- 1) Kondilenko & Co-Workers, Gintzon Lab, Stanford University, private communication, 2005
- 2) Dr. Mühlig, IPHT Jena

* Data was taken under laboratory conditions. Actual data may differ. Customer is recommended to test under his own environmental conditions.

Germany

**Heraeus Quarzglas
 GmbH & Co. KG**

Optics
 Quarzstraße 8
 63450 Hanau
 Phone +49 (6181) 35-62 85
 Fax +49 (6181) 35-62 70
 sales.hqs.optics.de@heraeus.com

USA

**Heraeus
 Tenevo LLC**

Optics
 100 Heraeus Blvd.
 Buford, GA 30518
 Phone +1 (678) 714-4350
 Fax +1 (678) 714-4355
 sales.hqs.optics.us@heraeus.com

UK

**Heraeus Quartz
 UK Ltd.**

Neptune Road, Wallsend
 Tyne & Wear NE28 6DD
 United Kingdom
 Phone +44 (191) 259 8454
 Fax +44 (191) 263 8040
 sales.hqs.optics.uk@heraeus.com

China

**Heraeus (China)
 Investment Co., Ltd.**

Building 5,
 No. 406 Guilin Road, Xuhui District,
 Shanghai 200233
 Telefon +86 (21) 3357 5173
 Fax +86 (21) 3357 5230
 sales.hqs.optics.cn@heraeus.com